




# CO.SI.ME.

EQUIPMENT FOR ATEX



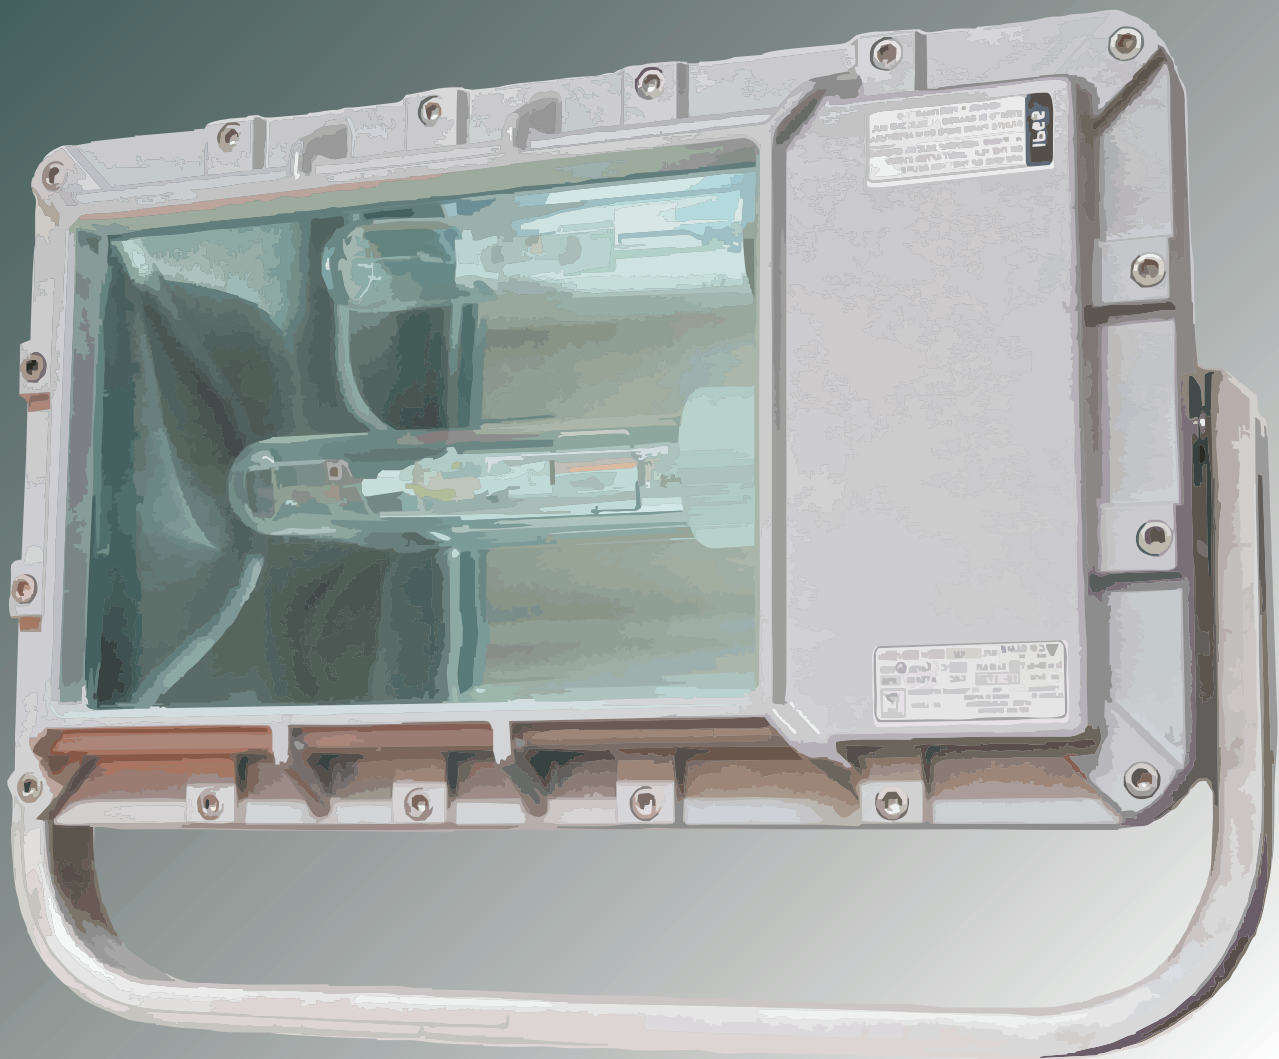

<b>GAS</b>	<b>II2G Ex de IIB+H<sub>2</sub> T4÷T3</b>	<b>*IP65/IP66</b>	<b>Zone 1 - Zone 21 - Zone 2 - Zone 22</b>
<b>DUST</b>	<b>II2D Ex tD A21 T130°C÷T195°C</b>	<b>*IP65/IP66</b>	<b>❄️-20°C ÷ ☀️+40°C      ❄️-20°C ÷ ☀️+60°C</b>


**Materiale :** Corpo e coperchio di lega leggera  
**Parte trasparente :** Vetro temperato  
**Riflettore :** Alluminio speculare simmetrico  
**Installazione :** Staffa orientabile in acciaio inox AISI 304  
**Viteria :** Acciaio inox AISI 304  
**Guarnizioni :** Silicone  
**Portalampane :** Ceramico  
**Parti elettriche :** Vano separato  
**Collegamento :** Morsettiera in scatola Ex e II  
**Ingresso :** N° 1 ø 3/4"

**Material :** Light alloy cover and body  
**Transparent part :** Tempered glass  
**Reflector :** Aluminium mirror  
**Installation :** Stainless steel AISI 304 adjustable support  
**Hardware :** Stainless steel AISI 304  
**Gaskets :** Silicon  
**Lampholder :** Ceramic  
**Electrical parts :** separate compartment  
**Connection :** Terminals inside Ex e II compartment  
**Cable entry :** N° 1 ø 3/4"

\* IP65 con grasso al silicone sui giunti piani  
 IP66 conguarnizione al silicone  
 IP65 with silicon grease on flat joints  
 IP66 with silicon gasket

**Potenza :** Vedi tabella  
**Tensione :** 230V a richiesta altre tensioni  
**Frequenza :** 50Hz, a richiesta 60Hz  
**Morsettiera :** 4mm<sup>2</sup>

**Power :** See table  
**Voltage :** 230V other voltages on request  
**Frequency :** 50Hz, 60Hz on request  
**Terminals :** 4mm<sup>2</sup>

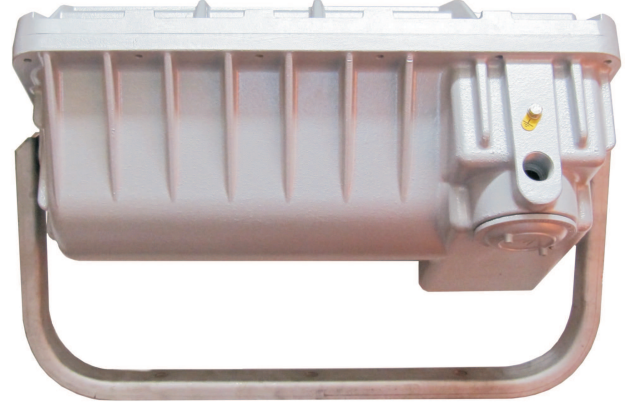

Codice Code	Potenza Power	Attacco Cap	T class @ +40°C	T class @ +60°C	Peso Weight
<b>Vapori di mercurio / Mercury vapour</b>					
RFL 250RHg	250 W	E40	T4	T3	23
RFL 400RHg	400 W	E40	T3	T3	23
<b>Ioduri metallici / Metal halide</b>					
RFL 150RMH	150 W	E27	T4	T3	22
RFL 250RMH	250 W (2,15A)	E40	T4	T3	22
RFL 400RMH	400 W (3,25A)	E40	T3	T3	25
<b>Sodio HP / HP Sodium</b>					
RFL 150RNa	150 W	E27	T4	T3	22
RFL 250RNa	250 W	E40	T4	T3	23
RFL 400RNa	400 W	E40	T3	T3	25
<b>Alogena / Halogen</b>					
RFL 500H	max 500 W	E40	T3	T3	20

